




201081.27.15.SS.0

Hydrofloor Nano Xxs

Round ground-recessed luminaire for outdoor installation flush with the ground, hard anodized black aluminium body and cover/diffuser made entirely in tempered safety glass, moulded silicone gasket. Remote constant current 350 mA driver needed, with 1 CREE XP-G2 LED. IP68 rating.

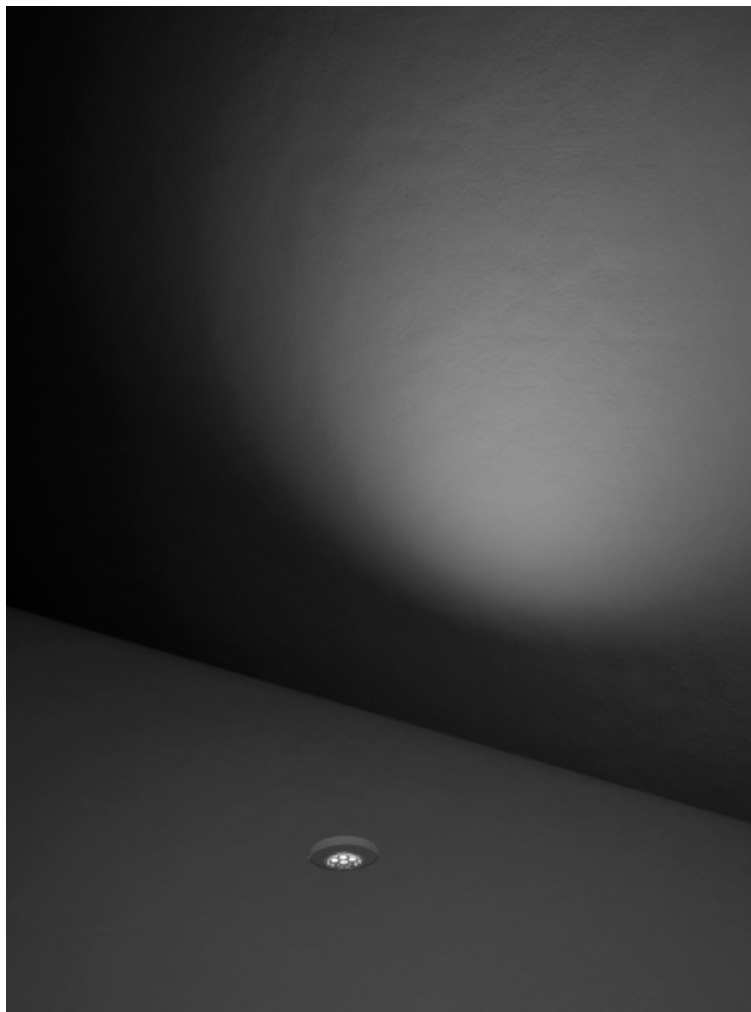

Light Source Technical Data

Wattage	1W
CCT	2700K
Beam Angle	15°
Lumens	71
Finish	STAINLESS STEEL
Dimming	ON/OFF
IP Rating	IP68
IK Rating	IK09
Light Source	Nr. 1 CREE XP-G2 LED
Transformer	Remote driver Constant current max 350 mA
Gasket	Silicone rubber
Glass	Tempered
Cable Gland	M12
Power Cable	1 mt. neoprene power cable included
Gross Weight	0,20 Kg

Technical Feature



Integrated Accessories

Built-in accessories to be requested when ordering

example 201081.27.15.SS.0.HC


201081.27.15.SS.0. _ _



.00

NO ACCESSORY

No accessory



.HC

honeycomb LOUVER

Remote Driver Selection

ALVIT Italy AL1435S-IP constant current 350mA 14W IP67 min 1 – max 8

Meanwell LPC-20-350 constant current 350mA 16.8W IP67 min 4 – max 12 1

Gallery

