

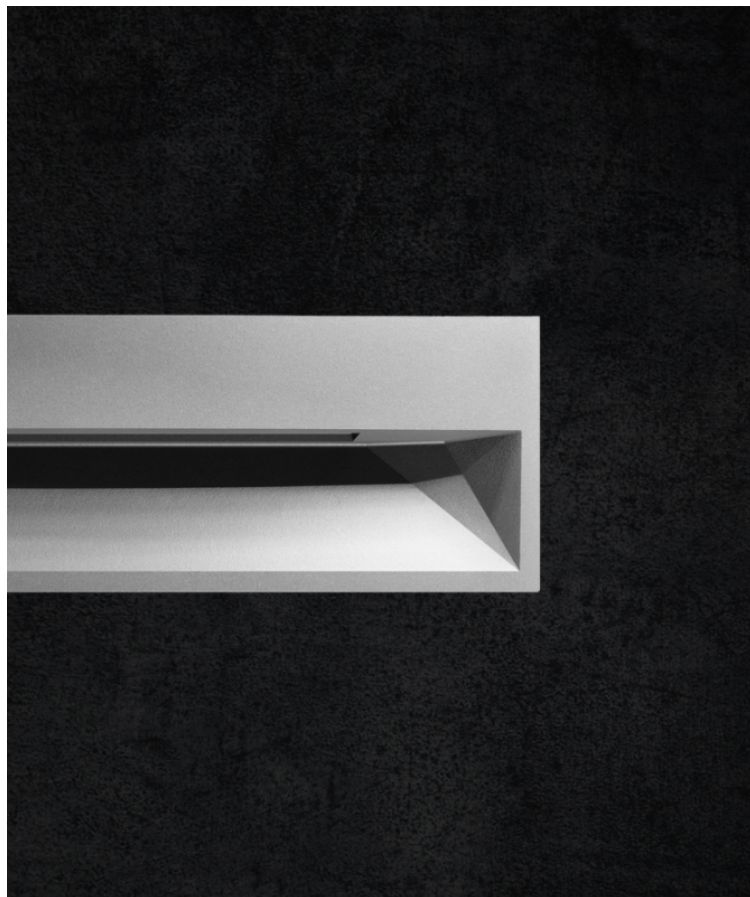


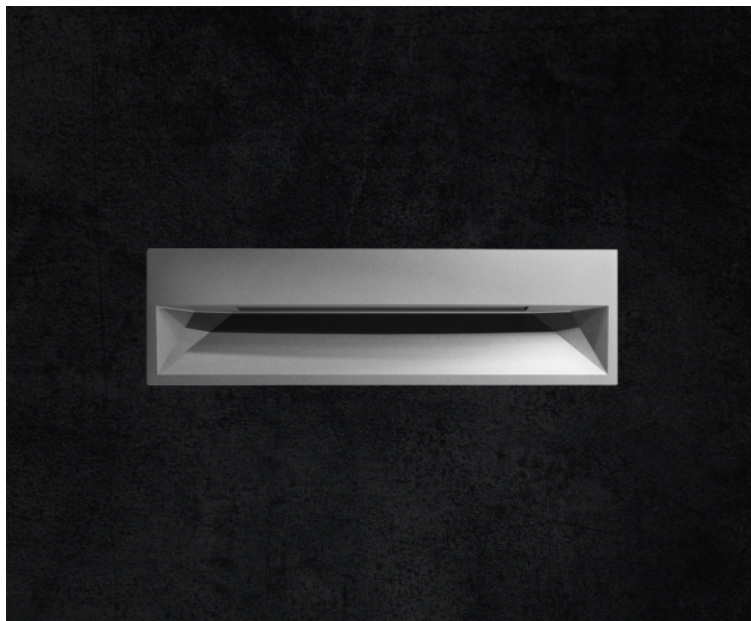

506016.40.FW.01.0

Passoluce Medium Linear

Linear shape wall-recessed luminaire with floor-wahser light distribution for outdoor installation, phospho-chromatised and polyester powder coated diecast copper-free aluminium body, tempered sand-blasted glass diffuser, moulded silicone gaskets, polypropylene housing for recess. Built-in driver 220-240V 50-60Hz. IP66 rating.



Light Source Technical Data

Wattage	14W
CCT	4000K
Beam Angle	floor washer
Lumens	525
Finish	RAL9006
Dimming	ON/OFF
IP Rating	IP66
IK Rating	IK08
Coating	Polyester powder coating with phosphocromating pre-finish
Screws	Copper-free aluminium
Transformer	Built-in
Gasket	Moulded silicone
Glass	Tempered sand-blasted
Gross Weight	1,60 Kg

Technical Feature



Integrated Accessories

Built-in accessories to be requested when ordering

example 506016.40.FW.01.0.HC

506016.40.FW.01.0. _ _



.00

NO ACCESSORY

No accessory

Gallery

