



modello:
model:

FIRE

codice:
code:

6340

design:

P. Pepere

anno - year:

2010

tipologia:

faretto da incasso

typology:

recessed spotlight

materiali:

alluminio - metacrilato

materials:

aluminium - methacrylate

luce:

diffusa

light:

diffuse

sorgente luminosa:

/W LED 1W 350mA 151lm 4000K

light sources:

/WW LED 1W 350mA 143lm 3000K**/XW LED 1W 350mA 138lm 2700K**

grado IP - IP grade:

IP44

peso netto - net weight:

0,08 Kg

finiture:

.00 trasparente

finishes:

.00 clear


marcatura:
marking:

CE

simboli costruttivi:
symbols:




Dimensioni - Dimensions

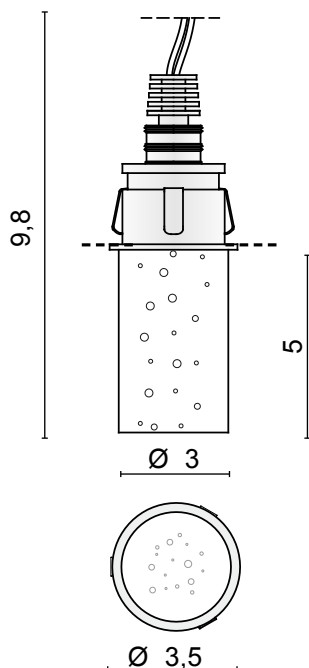

 3,2 cm

Accessori - Accessories

**0213**

KIT: box + plaster traforato
KIT: box + perforated plaster

**0216**

Controcassa in materiale plastico
Plastic box

SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION



La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.

EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax: +39 02 3535112
e-mail: info@egoluce.com - http://www.egoluce.com

LED DRIVERS in corrente continua LED DRIVERS constant current

0125

LED driver

IN: 100 - 240V
OUT: 350 mA
1-6 Power LED 1W




SELV

6 x 3,5 x 2 cm 4 cm

0128

LED driver

IN: 100 - 240V
OUT: 350 mA
1-10 Power LED 1W




11,6 x 3,4 x 2 cm 4 cm SELV CLASS 2

0136/15

LED driver

IN: 100 - 240V
OUT: 350 mA
1-10 Power LED 1W




15,8 x 2,2 x 2 cm 3,2 cm SELV

0169/50

Multipower LED driver

IN: 220 - 240V
OUT: 350mA
min.4-max22 Power LED 1W




13 x 7,5 x 3 cm 8,5 cm SELV

DRIVERS DIMMERABILI in corrente continua DIMMABLE LED DRIVERS constant current

0129 Dimmer Led

Multipower dimmable driver

IN: 110 - 240V
OUT: 350 mA, 4-15 Power LED




10,5 x 7 x 2,2 cm 7,2 cm SELV

0129/DALI Dimmer Led

Multipower dimmable driver

IN: 110 - 240V
OUT: 350 mA, 2-12 Power LED




10,5 x 7 x 2,2 cm 7,2 cm SELV

0141/DALI

LED driver

IN: 110 - 240V
OUT: 350 mA, 1-12 Power LED




11,1 x 5,2 x 2,5 cm 5,5 cm

0141/DIM

LED driver

IN: 110 - 240V
OUT: 350 mA, 1-12 Power LED




Versione PUSH non sincronizzabile - PUSH version not synchronizable

11,1 x 5,2 x 2,5 cm 5,5 cm

0145 Dimmer Led Maxi

Multipower dimmable driver

IN: 110 - 240V
OUT: 350 mA, 1- 21 power LED




12,3 x 8 x 2,2 cm 8,4 cm SELV

0145/DALI Dimmer Led Maxi

Multipower dimmable driver

IN: 110 - 240V
OUT: 350 mA, 1- 21 power LED



12,3 x 8 x 2,2 cm 8,4 cm SELV

0133

Cavo di sincronizzazione per dimmer LED

Sincronization cable for dimmer LED

(art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)




L 150 cm

0726/DIM

LED dimmer

TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)

IN: 220 - 240V
OUT: 24V - 20W
350 mA, 1-12 Power LED




16,5 x 4,5 x 3,5 cm 5,6 cm IGBT-TRIAC SELV

IP LED DRIVERS in corrente continua IP LED DRIVERS constant current


0031/IP

LED driver

IN: 220 - 240V
OUT: 350 mA
1-12 Power LED 1W



3,9 x 8 x 2 cm 4,2 cm IP67 SELV



La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.

EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax. +39 02 3535112
e-mail: info@egoluce.com - http://www.egoluce.com