


modello: model:	**SLOT**
codice: code:	**6381**
design:	**UT Egoluce**
anno - year:	**2010**
tipologia: tipology:	**faretto da incasso** **recessed spotlight**
materiali: materials:	**corpo in metallo** **metal frame**
luce: light:	**asimmetrica** **asymmetric**
sorgente luminosa: light sources:	**/XW** LED 1W 350mA 132lm 2700K **/WW** LED 1W 350mA 143lm 3000K **/W** LED 1W 350mA 151lm 4000K
grado IP - IP grade:	**IP20**
peso netto - net weight:	**0,20 Kg**
finiture: finishes:	**.01 bianco** **.01 white**
optional:	**0249 kit + plaster**
marcatura: marking:	CE
simboli costruttivi: symbols:	F III

SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION

Dimensioni - Dimensions

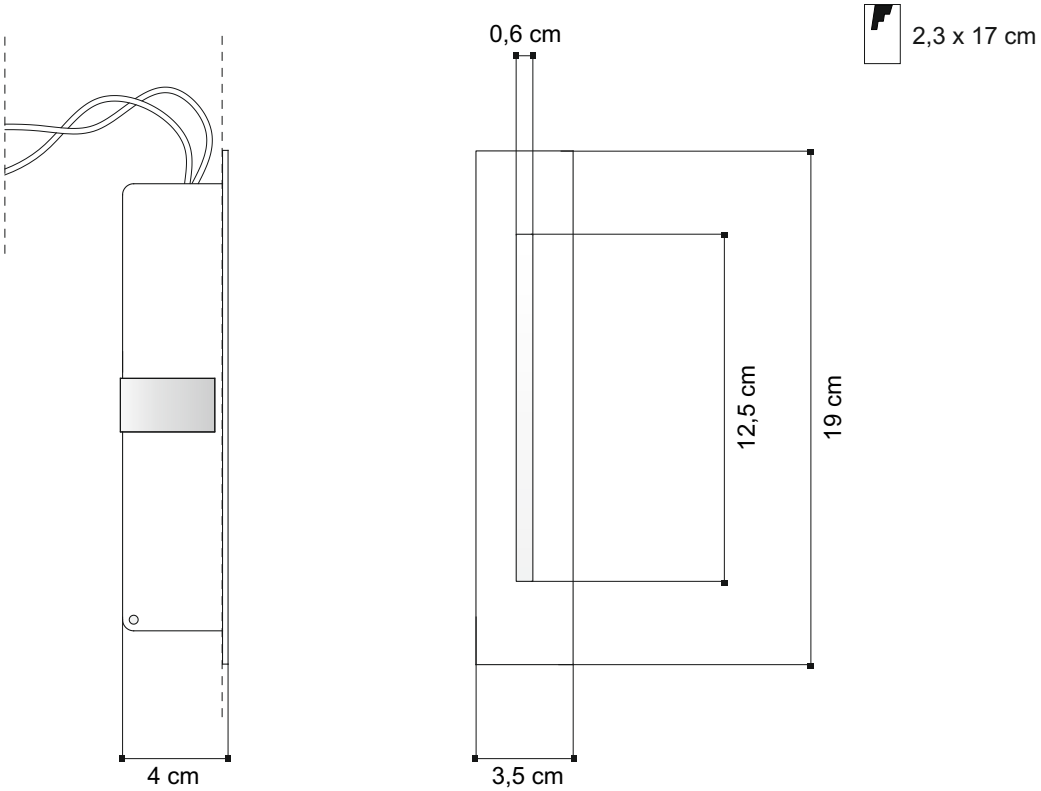

EGOLUCE s.r.l, via I.Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax. +39 02 3535112
e-mail: info@egoluce.com - http://www.egoluce.com

La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.


LED DRIVERS in corrente continua
LED DRIVERS *constant current*

0125
LED driver
IN: 100 - 240V
OUT: 350 mA
1-6 Power LED 1W




6 x 3,5 x 2 cm — 4 cm — SELV — KEMA KEUR

0128
LED driver
IN: 100 - 240V
OUT: 350 mA
1-10 Power LED 1W




11,6 x 3,4 x 2 cm — 4 cm — SELV — CLASS 2 — 05 — c UL us

0136/15
LED driver
IN: 100 - 240V
OUT: 350 mA
1-10 Power LED 1W



15,8 x 2,2 x 2 cm — 3,2 cm — SELV — 05 — c UL us


0169/50
Multipower LED driver
IN: 220 - 240V
OUT: 350mA
min.4-max22 Power LED 1W



13 x 7,5 x 3 cm — 8,5 cm — SEL — 05


DRIVERS DIMMERABILI in corrente continua
DIMMABLE LED DRIVERS *constant current*

0129 Dimmer Led
Multipower dimmable driver
IN: 110 - 240V
OUT: 350 mA, 4-15 Power LED




10,5 x7 x 2,2 cm — 7,2 cm — SELV — PUSH — 1...10 V — c UL us — 05

0129/DALI Dimmer Led
Multipower dimmable driver
IN: 110 - 240V
OUT: 350 mA, 2-12 Power LED




10,5 x 7 x 2,2 cm — 7,2 cm — SELV — DALI — 05 — c UL us

0141/DALI
LED driver
IN: 110 - 240V
OUT: 350 mA, 1-12 Power LED



11,1 x 5,2 x 2,5 cm — 5,5 cm — DALI — 05 — c UL us


0141/DIM
LED driver
IN: 110 - 240V
OUT: 350 mA, 1-12 Power LED



Versione PUSH non sincronizzabile - PUSH version not synchronizable


11,1 x 5,2 x 2,5 cm — 5,5 cm — PUSH — 1...10 V — 05 — c UL us

0145 Dimmer Led Maxi
Multipower dimmable driver
IN: 110 - 240V
OUT: 350 mA, 1- 21 power LED



12,3 x 8 x 2,2 cm — 8,4 cm — SELV — PUSH — 1...10 V — 05 — c UL us

0145/DALI Dimmer Led Maxi
Multipower dimmable driver
IN: 110 - 240V
OUT: 350 mA, 1- 21 power LED




12,3 x 8 x 2,2 cm
8,4 cm — SELV — DALI — PUSH — 1...10 V — 05 — c UL us

0133
Cavo di sincronizzazione per dimmer LED
Sincronization cable for dimmer LED
(art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)



L 150 cm


0726/DIM
LED dimmer
TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
IN: 220 - 240V
OUT: 24V - 20W
350 mA, 1-12 Power LED



16,5 x 4,5 x 3,5 cm — 5,6 cm — PUSH — IGBT-TRIAC — 05 — SELV

IP LED DRIVERS in corrente continua
IP ***LED DRIVERS*** *constant current*


0031/IP
LED driver
IN: 220 - 240V
OUT: 350 mA
1-12 Power LED 1W



3,9 x 8 x 2 cm — 4,2 cm — IP67 — SELV

ACCESSORI
ACCESSORIES

0249
box + plaster



EGOLUCE s.r.l, via I.Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax. +39 02 3535112
e-mail: info@egoluce.com - http://www.egoluce.com

La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.