



modello:
model:

CRUISE

codice:
code:

6382

design:

UT Egoluce

anno - year:

2010

tipologia:

faretto da incasso

typology:

recessed spotlight

materiali:

alluminio

materials:

aluminium

luce:

segni di luce

light:

segni di luce

sorgente luminosa:

light sources:

/XW LED 1W 350mA 132lm 2700K

/WW LED 1W 350mA 143lm 3000K

/W LED 1W 350mA 151lm 4000K

/B LED 1W 350mA LED BLU

grado IP - IP grade:

IP20

peso netto - net weight:

0,02 Kg

finiture:

.01 bianco

finishes:

.01 white

optional:

**0215 controcassa in materiale plastico
plastic box**



**0212 kit: box + plaster traforato
kit: box + perforated plaster**

marcatura:


marking

CE

simboli costruttivi:
symbols:



Dimensioni - Dimensions

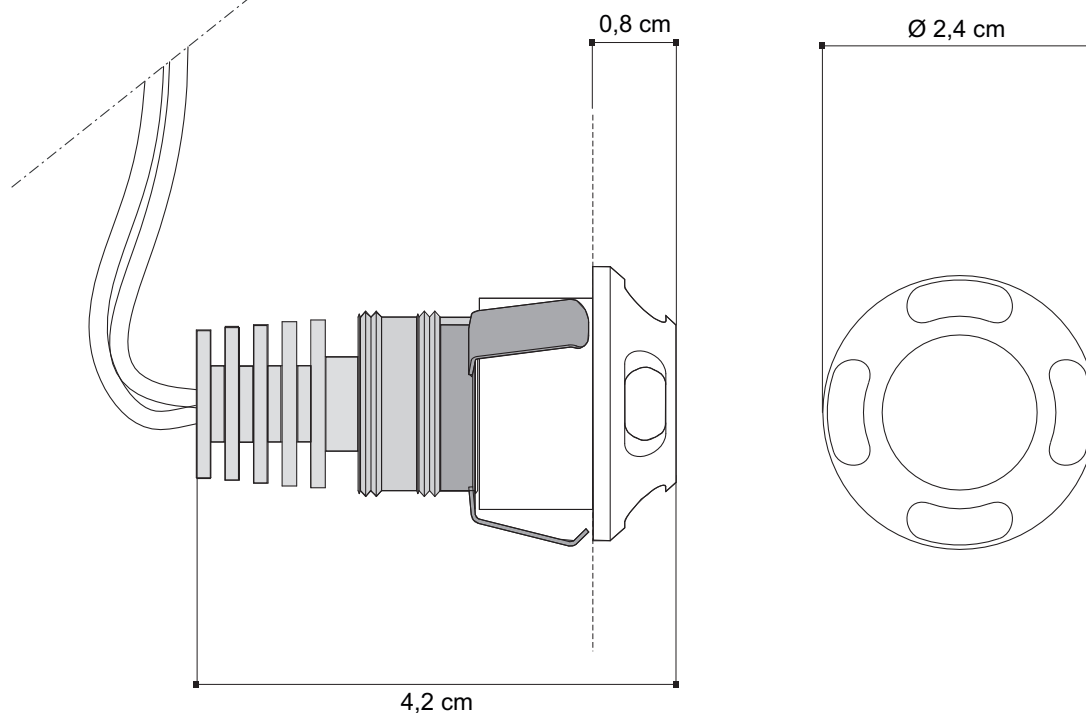

SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION

 **2 cm**



La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.

EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax. +39 02 3535112
e-mail: info@egoluce.com - <http://www.egoluce.com>

LED DRIVERS in corrente continua
LED DRIVERS constant current
0125**LED driver**

IN: 100 - 240V
 OUT: 350 mA
 1-6 Power LED 1W




SELV KEMA

6 x 3,5 x 2 cm 4 cm

0128**LED driver**


IN: 100 - 240V
 OUT: 350 mA
 1-10 Power LED 1W



11,6 x 3,4 x 2 cm 4 cm SELV CLASS 2

0136/15**LED driver**


IN: 100 - 240V
 OUT: 350 mA
 1-10 Power LED 1W



15,8 x 2,2 x 2 cm 3,2 cm SELV

0169/50**Multipower LED driver**


IN: 220 - 240V
 OUT: 350mA
 min.4-max22 Power LED 1W



13 x 7,5 x 3 cm 8,5 cm SELV

DRIVERS DIMMERABILI in corrente continua
DIMMABLE LED DRIVERS constant current
0129 Dimmer Led**Multipower dimmable driver**


IN: 110 - 240V
 OUT: 350 mA, 4-15 Power LED



10,5 x 7 x 2,2 cm 7,2 cm SELV

0129/DALI Dimmer Led**Multipower dimmable driver**


IN: 110 - 240V
 OUT: 350 mA, 2-12 Power LED



10,5 x 7 x 2,2 cm 7,2 cm SELV

0141/DALI**LED driver**


IN: 110 - 240V
 OUT: 350 mA, 1-12 Power LED



11,1 x 5,2 x 2,5 cm 5,5 cm

0141/DIM**LED driver**

IN: 110 - 240V
 OUT: 350 mA, 1-12 Power LED




Versione PUSH non sincronizzabile - PUSH version not synchronizable

11,1 x 5,2 x 2,5 cm 5,5 cm

0145 Dimmer Led Maxi**Multipower dimmable driver**


IN: 110 - 240V
 OUT: 350 mA, 1- 21 power LED



12,3 x 8 x 2,2 cm 8,4 cm SELV

0145/DALI Dimmer Led Maxi**Multipower dimmable driver**

IN: 110 - 240V
 OUT: 350 mA, 1- 21 power LED



12,3 x 8 x 2,2 cm 8,4 cm SELV

0133


Cavo di sincronizzazione per dimmer LED
 Synchronization cable for dimmer LED
 (art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)



L 150 cm

0726/DIM**LED dimmer**


TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
 PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
 IN: 220 - 240V
 OUT: 24V - 20W
 350 mA, 1-12 Power LED



16,5 x 4,5 x 3,5 cm 5,6 cm IGBT-TRIAC SELV

IP LED DRIVERS in corrente continua
IP LED DRIVERS constant current
0031/IP**LED driver**

IN: 220 - 240V
 OUT: 350 mA
 1-12 Power LED 1W



3,9 x 8 x 2 cm 4,2 cm IP67 SELV

ACCESSORI
ACCESSORIES
0215

Controcassa in materiale plastico
 Plastic Box

**0212**

Kit: box + plaster traforato
 Kit: box + perforated plaster

