




Dimensioni - Dimensions

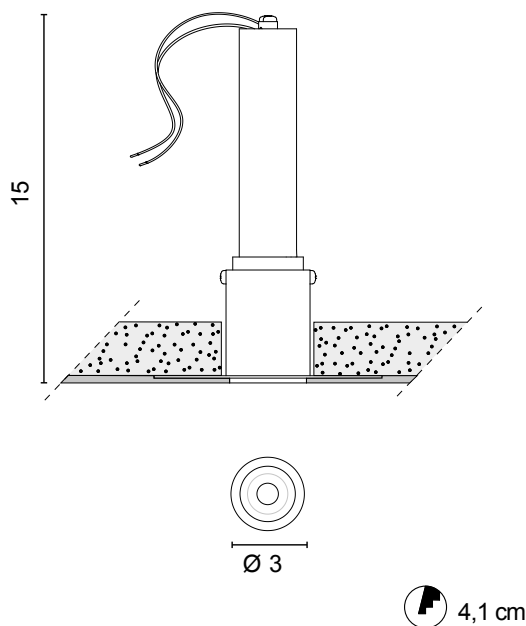

modello:
model:

STAR ZERO

codice:
code:

6689

design:

UT EgoLuce

anno - year:

2020

tipologia:

typology:

micro faretto trimless ad incasso a scomparsa totale
mini trimless recessed spotlight

materiali:

materials:

corpo in alluminio

aluminium structure

luce:

light:

d'accento

spot

sorgente luminosa:

light sources:

LED color	OPTIC degree		lm	LED color
/W	/25 /48 /63	LED 6,1W 17,3V 350mA	975lm	4000K
/W/ST	metacrilato satinato - satin methacrylate	LED 6,1W 17,3V 350mA	975lm	4000K
/WW	/25 /48 /63	LED 6,1W 17,3V 350mA	939lm	3000K
/WW/ST	metacrilato satinato - satin methacrylate	LED 6,1W 17,3V 350mA	939lm	3000K
/XW	/25 /48 /63	LED 6,1W 17,3V 350mA	896lm	2700K
/XW/ST	metacrilato satinato - smethacrylate	LED 6,1W 17,3V 350mA	896lm	2700K

grado IP - IP grade:

40

IP65 disponibile su richiesta
IP65 available on request

peso netto - net weight:

0,30 Kg

finiture - finishes:

.01 bianco **.01 white**
.02 nero **.02 black**

options:

/ST
diffusore in metacrilato satinato
satin methacrylate diffuser

marcatuta:

marking:



simboli costruttivi:

symbols:

**SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION**

I drivers, opportunamente scelti, possono passare dal foro incasso del faretto o inseriti anche con cassaforma montata.

*Driver can pass through the recessed hole of the spotlight.
Driver can also be inserted with a mounted formwork.*



La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, i disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.

EGOLUCE s.r.l. via I. Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax: +39 02 3535112
e-mail: info@egoluce.com - http://www.egoluce.com

scheda tecnica - data sheet

2/2

LED DRIVERS in corrente continua LED DRIVERS constant current

0125

LED driver
IN: 100 - 240V
OUT: 350 mA
1 COB LED




6 x 3,5 x 2 cm  4 cm

SELV 

0128

LED driver
IN: 100 - 240V
OUT: 350 mA
1-2 COB LED




11,6 x 3,4 x 2 cm  4 cm

 
SELV CLASS 2

0136/15

LED driver
IN: 100 - 240V
OUT: 350 mA
1-2 COB LED




15,8 x 2,2 x 2 cm  3,2 cm

SELV  

0169/50

Multipower LED driver
IN: 220 - 240V
OUT: 350mA
1-3 COB LED




13 x 7,5 x 3 cm  8,5 cm

SELV 

DRIVERS DIMMERABILI in corrente continua DIMMABLE LED DRIVERS constant current

0129 Dimmer LED


Multipower dimmable driver
IN: 110 - 240V
OUT: 350 mA, 1-2 COB LED



10,5 x 7 x 2,2 cm  7,2 cm SELV  1...10 V  

0129/DALI Dimmer LED


Multipower dimmable driver
IN: 110 - 240V
OUT: 350 mA 1-2 COB LED



10,5 x 7 x 2,2 cm  7,2 cm SELV   

0141/DALI

LED driver
IN: 110 - 240V
OUT: 350 mA, 1-2 COB LED




11,1 x 5,2 x 2,5 cm  5,5 cm

0141/DIM

LED driver
IN: 110 - 240V
OUT: 350 mA, 1-2 COB LED




Versione PUSH non sincronizzabile - PUSH version not synchronizable

11,1 x 5,2 x 2,5 cm  5,5 cm

 1...10 V  

0145 Dimmer LED Maxi

Multipower dimmable driver
IN: 110 - 240V
OUT: 350 mA, 1-3 COB LED




12,3 x 8 x 2,2 cm

 8,4 cm SELV  1...10 V  

0145/DALI Dimmer LED Maxi

Multipower dimmable driver
IN: 110 - 240V
OUT: 350 mA, 1-3 COB LED



12,3 x 8 x 2,2 cm

 8,4 cm SELV   1...10 V  


0133

Cavo di sincronizzazione per dimmer LED
Sincronization cable for dimmer LED
(art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)
L 150 cm



0726/DIM

LED dimmer
TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
IN: 220 - 240V
OUT: 24V - 20W
350 mA, 1-2 COB LED




16,5 x 4,5 x 3,5 cm  5,6 cm

 IGBT-TRIAC  SELV

0733/DIM

LED dimmer
Alimentatori elettronici dimmerabili (IGBT-TRIAC) in corrente continua
Direct current dimmable (TRAILING EDGE-LEADING EDGE) electronic drivers
IN: 220 - 240V
OUT: 350 mA, 1 COB LED




8,7 x 3,8 x 2,1 cm  4,2 cm

IGBT-TRIAC  SELV

IP LED DRIVERS in corrente continua IP LED DRIVERS constant current

0031/IP

LED driver
IN: 220 - 240V
OUT: 350 mA
1-2 COB LED



3,9 x 8 x 2 cm  4,2 cm

IP67 SELV



La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, i disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.

EGOLUCE s.r.l, via I. Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax. +39 02 3535112
e-mail: info@egoluce.com - http://www.egoluce.com