



MINI SPRING Floodlight

8814511

MINI SPRING Floodlight - 1 COB LED 3000K 20°

Lighting information

Source power type	1 COB LED
Colour temperature	3000K
CRI	>80
MCADAMS	3
LM 80/TM-21	L80B10@>60Kh

Source power	18,00 W
Nominal flux	2340 lm

Plug-in power	19,00 W
Real flux	1860 lm
Maximum intensity	6905 cd/klm
Beam angle	20°

Power Supply Unit	220 ÷ 240V
Operating frequency	0/50/60 Hz
Power factor	0,95
Dimmable	Not dimmable
Safety class	I
Luminaires of B16A MCB	Max 50
Inrush current	5A 50µsec
Wiring	External
Cable section	3 x 1,00 mm ²
Cable length	1.000 mm;
Cable type	H05RN-F
Connector	To be ordered separately

Protection Rating	IP65
Breaking Strength	IK 06

Energy efficiency class	A/A+/A++
Diffuser type	Serigraphed extra-clear glass
Diffuser thickness	4 mm
Windage area	0.0270 m ²

Colours

Standard colour

● .06 Grey

Colours available on request

● .01 Black

○ .02 White

● .07 Corten

● .08 Anthracite

● .09 Bronze



Platek®

PLATEK s.r.l.
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY
P.IVA 03320290178 | Codice fiscale 03007130176
Registro delle Imprese di Brescia n. 03007130176 REA 311057
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:30/03/2022




MINI SPRING Floodlight

Product features

Die-cast body and flange made of aluminium alloy with very low copper content. A4 Stainless steel screws. Graduated ferrule in AISI 304 stainless steel with double locking system for safe positioning. GORE® valve to prevent condensing. Subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and final sealing. The product is painted following a continuous two step paint process (epoxy-based primer + polyester-based colour finish), which allows to generate a single thick protective coating which then generates a protective barrier against atmospheric agents and UV rays. Before fixing the diffuser on the Platek products a Pre- treatment using an atmospheric pressure plasma process is carried out on the surface. The process activates the ionic load on the surface exactly where it is needed, thus promoting the best silicone grip possible and removing any residual release of agents for a longer lasting seal. The next steps are the coating of silicone and the assembly of the diffuser on the lighting fixture, with an automated process to guarantee the perfect sealing of the lamp.

Technical dimensions

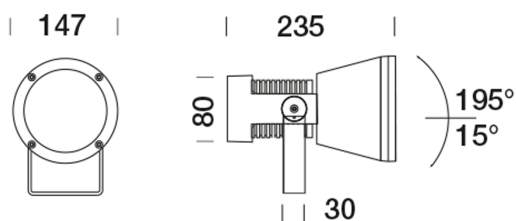


Technical shipping information

Net weight	2,80 kg
Gross weight	3,20 kg
Packaging width	300,00 mm
Packaging height	200,00 mm
Packaging depth	210,00 mm

8814511


MINI SPRING Floodlight - 1 COB LED 3000K 20°

Lighting information



Plug-in power	19,00 W
Real flux	1860 lm
Maximum intensity	6905 cd/klm
Beam angle	20°

Lighting Simulation

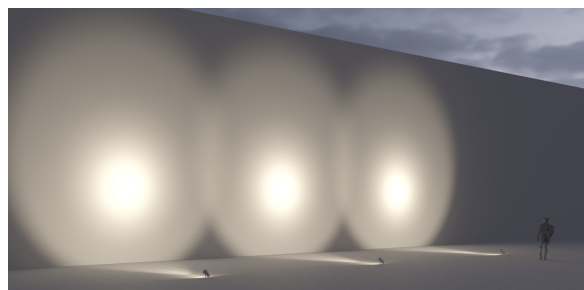

Spot beam angle

simulation made with MINI SPRING Floodlight 19,0 W 3000K

Optics:	20°
Code:	8814511
Distance from wall:	6 m
Distance between products:	7 m
Wall height:	10 m

Plug-in power	19,00 W
Real flux	1860 lm
Maximum intensity	6905 cd/klm
Beam angle	20°

Platek®

PLATEK s.r.l.
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY
P.IVA 03320290178 | Codice fiscale 03007130176
Registro delle Imprese di Brescia n. 03007130176 REA 311057
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:30/03/2022




MINI SPRING Floodlight


8814511

MINI SPRING Floodlight - 1 COB LED 3000K 20°

Mechanical accessories

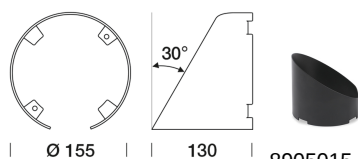

8905015
Visor (in color .01 black)




8905085
Tube shield (in color .01 black)




8918670
Elliptical filter




8918675
Sandblasted filter



8951040
Connection to the pole 60 mm Ø



8951045
Connection to the pole 102 mm Ø



8951050
Connection to the pole 114 mm Ø



9005605
Spike

Platek®

PLATEK s.r.l.
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY
P.IVA 03320290178 | Codice fiscale 03007130176
Registro delle Imprese di Brescia n. 03007130176 REA 311057
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update: 30/03/2022




MINI SPRING Floodlight

8814511

MINI SPRING Floodlight - 1 COB LED 3000K 20°

Mechanical accessories



8951076
Connection to the pole 76 mm Ø

Platek®

PLATEK s.r.l.
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY
P.IVA 03320290178 | Codice fiscale 03007130176
Registro delle Imprese di Brescia n. 03007130176 REA 311057
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update: 30/03/2022




MINI SPRING Floodlight


8814511

MINI SPRING Floodlight - 1 COB LED 3000K 20°


Electrical accessories




8917004
IP68 IN/OUT connector for 3x4 mm² cable



8917014
IP68 connector for 3x1,5 mm² cable



8952021
Junction box for one floodlight (Connector 8917014 included)



8952022
Junction box for two floodlights (Connector 8917004 included)



MINI SPRING Floodlight

8814511

MINI SPRING Floodlight - 1 COB LED 3000K 20°

The process of galvanisation and multi-coating protection

Platek goes well beyond the standards required for conventional protection processes, making use of its longstanding and in-depth expertise in aluminium alloys. All the aluminium components of the products - extruded, die-cast or turned - are subjected to a galvanic anodizing process in the phase following mechanical processing. The process increases their wear resistance and improves the adhesion of the paint. Galvanization involves three distinct phases: mechanical satin finishing and surface degreasing, anodic oxidation and fixing. After the first phase that eliminates any impurities, the aluminium body is immersed in special electrolytic tanks, in which the aluminium surface is transformed into aluminium oxide, which makes the metal more resistant. To respond optimally to the needs of the global market, all Platek products undergo a two-layer painting process. After preparation with washing and rinsing in accordance with the strictest environmental standards, the product is coated with an epoxy primer which guarantees, in addition to anodizing, an excellent degree of protection. The final step is the preparation of the polyester powder which gives the final velvety finish of the component. These last two phases, being done in a continuous cycle, form a single high-thickness layer that is resistant to the action of UV rays and atmospheric agents. This process allows corrosion resistance in salt fog that far exceeds the average standards of the market to be achieved.

The gluing process and plasma treatment

One of the most complex and delicate aspects in outdoor lighting products is the fitting of glass onto the lighting body. This must ensure over time an excellent degree of insulation from atmospheric agents, even in harsh environmental conditions, to maintain a stable performance with zero maintenance. The gluing process of the glass on Platek products is managed at an automated workstation, preceded by a pre-treatment of the surfaces with atmospheric pressure plasma. Pre-treatment modifies the characteristics and ionic properties of the treated surfaces, activates the polar materials at strategic points, removes any residue of detaching agents, such as silicones and oils with a precision microcleaning, favouring excellent wettability of the bonded surfaces and a stable seal in time. The gluing process of the glass with specific plasma treatment allows a bonding force four times greater than similar products to be obtained. The shaping of the surfaces is followed by the application of the silicone and the assembly of the glass onto the lighting body using an automated process that guarantees perfect sealing of the lamp.

Precise LED selection

All LEDs used by Platek, once assembled by trusted personnel are tested with suitable instruments to check the colour specification required by Platek standards. The choice of using only 3 McAdams colour steps and with a CRI value exceeding 90, provide a high level of light quality that is difficult to find in the world of outdoor lighting. As far as LED products are concerned, Platek has adopted a system of protection against electrostatic discharge along the entire production chain of electronic components to increase the resistance of circuits to power surges.

Platek®

PLATEK s.r.l.
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY
P.IVA 03320290178 | Codice fiscale 03007130176
Registro delle Imprese di Brescia n. 03007130176 REA 311057
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:30/03/2022