puk

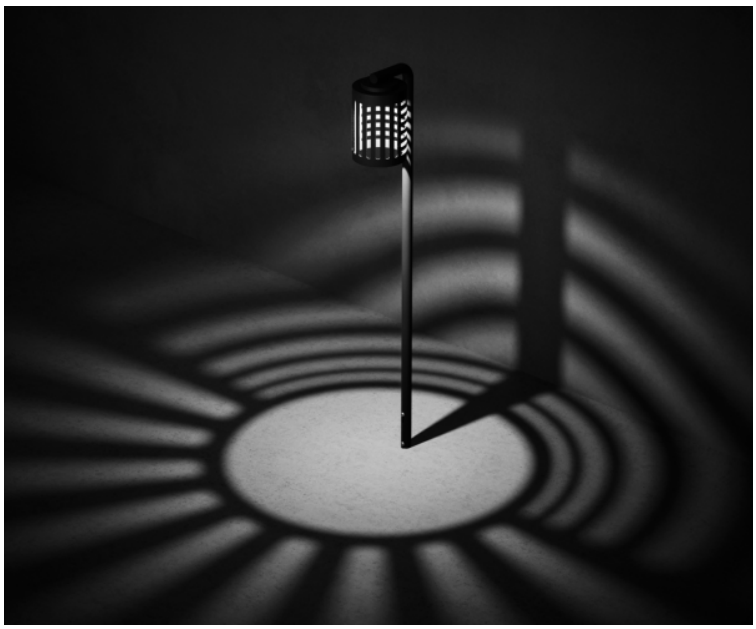

909005.30.DF.07.0

Lucea Bollard

Designed by

NAVA + AROSIO

Featuring a minimalist stainless-steel bollard structure and light head. All structural parts are phospho-chromatised and polyester powder coated. Total height 1020 mm. With 1 direct 220-240V LUMENS "EDC 38C" COB LED IP66 rating.



PUK ITALIA GROUP srl
Via San Giorgio 16
20851 Lissone (MB) – ITALY

T. +39 039 24.57.920
F. +39 039 24.57.924
puk@puk.it – puk.it

puk

Light Source
Technical Data

Wattage	8W
CCT	3000K
Beam Angle	Diffused
Lumens	450
Finish	Obsidian Black
Dimming	ON/OFF
IP Rating	IP66
Coating	Polyester powder coating with phosphocromating pre-finish
Light Source	1 x LUMENS EDC 38C COB LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Glass	CLEAR
Gross Weight	4,50 Kg

Technical Feature

ON OFF | IP66 | NEW | CE | 5 YEARS

PUK ITALIA GROUP srl
Via San Giorgio 16
20851 Lissone (MB) – ITALY

T. +39 039 24.57.920
F. +39 039 24.57.924
puk@puk.it – puk.it

Integrated Accessories

Built-in accessories to be requested when ordering

example 909005.30.DF.07.0**.HC**

909005.30.DF.07.0. _ _

.00

NO ACCESSORY

No accessory

PUK ITALIA GROUP srl
Via San Giorgio 16
20851 Lissone (MB) – ITALY

T. +39 039 24.57.920
F. +39 039 24.57.924
puk@puk.it – puk.it

puk

Remote Driver Selection

Meanwell	LPV-20-28	constant voltage 24V DC	20W	IP71	min 1 max 8
Meanwell	LPV-35-28	constant voltage 24V DC	35W	IP71	min 1 max 12

Gallery

PUK ITALIA GROUP srl
Via San Giorgio 16
20851 Lissone (MB) – ITALY

T. +39 039 24.57.920
F. +39 039 24.57.924
puk@puk.it – puk.it