


TensoNodo

CL1690B2


TensoNodo bears the essential mark of Nodo on the iconic Cini&Nils cable system. The compact module integrates into the cable system, transforming into an adjustable spotlight capable of rotating up to 350° on two axes to ensure maximum flexibility of orientation. The light can be directed with precision, enhancing surfaces, objects and architectural details. TensoNodo combines the visual lightness of the cable system with the versatility of an adjustable spotlight, offering dynamic solutions for residential and professional environments. An essential system, designed to adapt to the space with freedom and control.

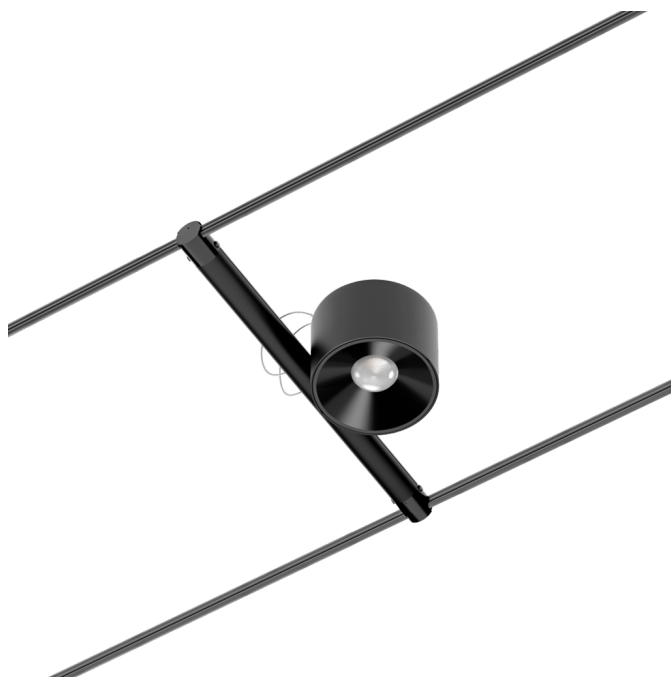


Color: Black RAL 9005

Characteristics

Material	Aluminium
Finish	Black RAL 9005
Configuration	Double horizontal wire
IP rating	IP 20
Insulation class	2
Lamp/Led	LED
Power supply	included
Dimming	Phase-cut
Watt	8W
Volt	220-240V
°K	2.7K
Emission	Direct
Lumen	665 lm
Real lumen	530 lm
CRI	CRI > 90
Version	60° lens
Height (mm)	60
Diameter (mm)	85
Weight (g)	600
Certifications	CE, UKCA



29 cm
11 3/8"



6 cm
2 3/8"

10,8 cm
4 1/4"

