VELVET – PL VEL 160 – technical sheet

Axolight

PLVEL160
Design by Manuel Vivian

Collection of ceiling and suspended lamps. The radial diffuser and light covering are treated with a flame-retardant (Glow wire 960 °C and 750°C respectively). Available in several colours and sizes.

Typology: CEILING

Ratings
•E27
•Downlight
•Surface installation over holes
•Supply voltage ~220-240V
•Switch mode: on-off
•Steel frame, painted
•Radial cone diffuser in pongé fabric and light covering in jersey

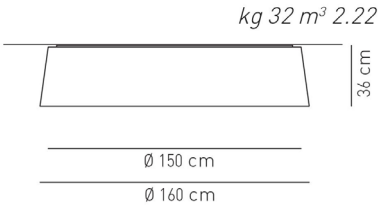

Product code composition

VELVET / diffusore INCLUSO / *diffuser INCLUDED*

Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
PL	VEL 160 E27	BC ice white	BC white	E27 5 x Max 16W LED or 5 x Max 46W halogen
		BA ivory white	BW warm white	
		BL blue		
		MA brown		
		NE black		

CE IP20 +LED 220-240VAC

example composition code PL VEL160E27 BL BC

Equivalent Sound Absorption Area (A) in m ² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,45	1,17	1,49	1,56	1,72	1,97	3,16	1,65	1,59

Available lampshade colors

BC Ice white | BA Ivory white | BL Blue | MA Brown | NE Black

Available radial diffuser colors

BC White | BW Warm white

PLVEL160E27_ _ _ _

CUSTOMER_____

NOTES_____

NOTICE:
Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

AXO LIGHT srl, via Moglianese 44 - 30037 Scorzè (VE), Italy - T +39 041 5845193 - F +39 041 5845060
axolight@axolight.it - www.axolight.it