

SPIGOLO WALL CEILING

Studiocharlie

Designed to provide 360° directional lighting, the Spigolo collection features LED light sources housed within an extruded aluminium and tubular structure, connected by moulded polymer joints, which allow the profiles to rotate to produce direct or indirect lighting, shielded by a polycarbonate opal diffuser. The floor version is designed to provide a virtual room divider, while the ceiling and wall versions provide versatile and comfortable ambient lighting.



2700K

LAMPING

Source	linear LED
Total power	14W
Emission	diffused
Tension	110-240V
Color temperature led	2700K
Luminous flux led	560lm
Typ CRI	85
Ip class	20
Materials	aluminium + PC + ABS
Notes	360° orientable diffuser, white RAL 9003, black RAL 9005
Net lamp weight	1,5 kg

Codes

SPI LW2 31

SPI LN2 31

Structure

white


black

PACKAGE

Package 01

Dimension: 30x45x20 cm / Gross weight: 2,1 kg

Certificazioni

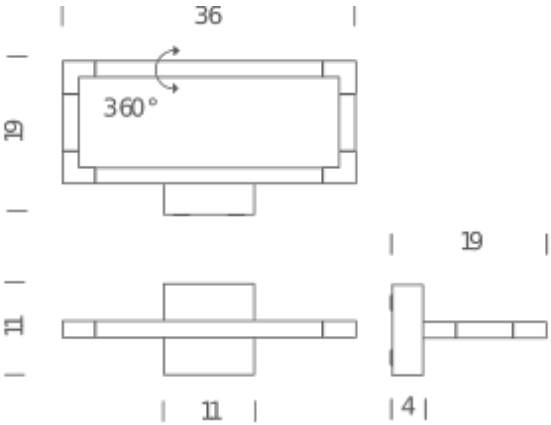

3000K

LAMPING

Source	linear LED
Total power	14W
Emission	diffused
Tension	110-240V
Color temperature led	3000K
Luminous flux led	560lm
Typ CRI	85
Ip class	20
Materials	aluminium + PC + ABS
Notes	360° orientable diffuser, white RAL 9003, black RAL 9005
Net lamp weight	1,5 kg

Codes

SPI LWW 31

SPI LNN 31

Structure

white

black

PACKAGE

Package 01

Dimension: 30x45x20 cm / Gross weight: 2,1 kg

Certificazioni

