


FLOS

F0396009 Off-white

Almendra Organic Suspension Short 2 Primer

NEW

Designed by Patricia Urquiola, 2022

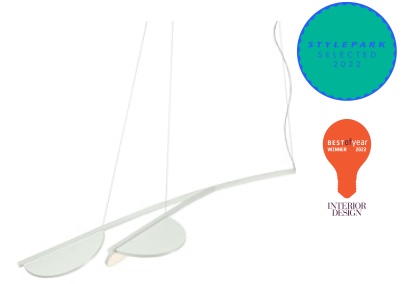


30W - 1170lm - 2700K - CRI > 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with primer finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

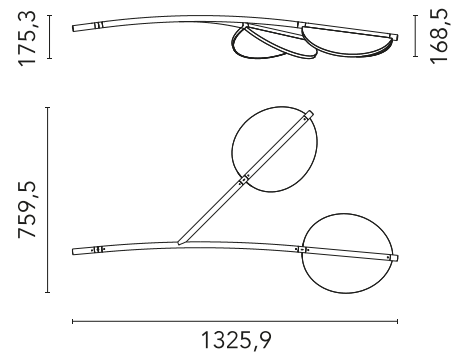

Main specifications

| | |
|-------------------|---------------------|
| EAN | 8059607050989 |
| Mounting | Suspension |
| Environments | Indoor dry location |
| Light Source Type | LED |
| LED type | Edge Lighting |
| Power (W) | 30 |
| System flux (lm) | 1170 |

Physical

| | |
|-----------------------|-----------|
| Colour | Off-white |
| Length (mm) | 1326 |
| Cord length (mm) | 2600 |
| Canopy dimension (mm) | 39 |
| Canopy width (mm) | 799 |
| Canopy height (mm) | 70 |
| Net weight (kg) | 8.17 |
| Package volume (m3) | 0.21 |
| IP internal | 20 |

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ LDT](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

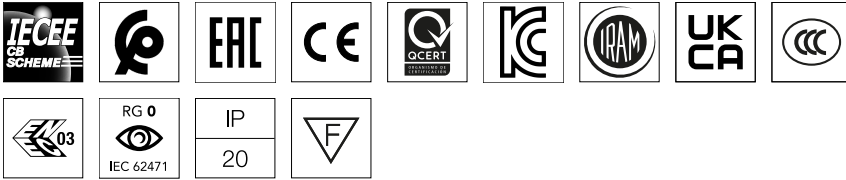

Schematic light drawing



Photometric


| | |
|--------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 2700 |
| CRI> | 95 |

Electrical


| | |
|----------------------|---|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| LED voltage Vf (Vdc) | null |
| Power Supply | Integrated |
| Dimmable | Yes |
| Power Supply Type | Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1 |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Non-replaceable light source




Replaceable control gear by a professional

Spare Parts

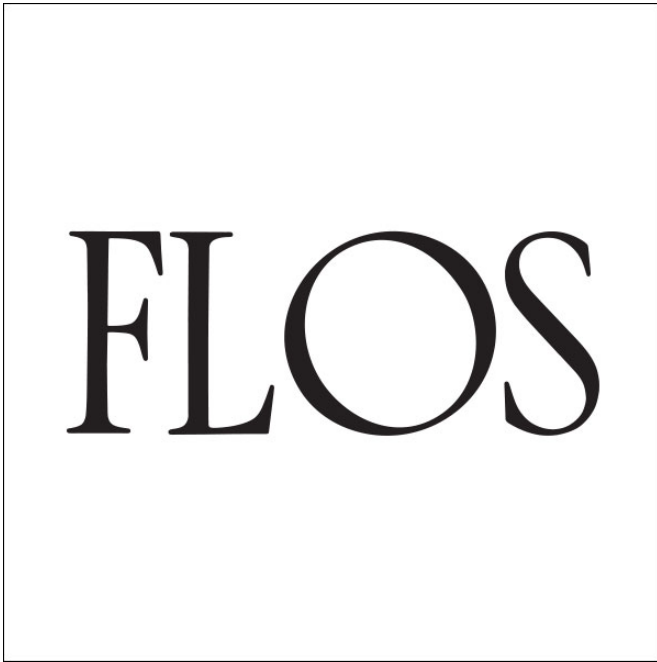


- | | | |
|-----|-----------------------------------|---------|
| 00. | Driver 96W 48V 220-240V | RF32405 |
| 00. | Assembly Almendra S Body White | RF32514 |



RF32405

Driver 96W 48V 220-240V



RF32514

Assembly Almendra S Body White