FLOS

F011W20D059 Brass Finish

Captain Flint Outdoor W1 Dimmable DALI

Designed by Michael Anastassiades, 2020

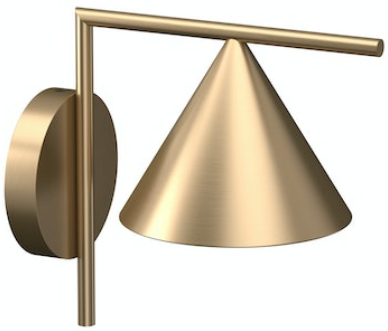

Luminaire for wall-mounting with diffuse light emission and fixed head. LED light source included. Integrated 220-240V ON/OFF or 1-10V/DALI dimmable electrical power. Connection is quickly ensured in the rose with the plug & play electrical connection and the IP68 connector included. Clamp bracket included. 110V version upon request.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling and wall surface
LED type	LED array
Lamp category	LED
Number of heads	1
Power (W)	9.5
Source flux (lm)	1055
System flux (lm)	613

Physical

Colour	Brass Finish
Trim	No
Orientation	Fixed
Recessed depth (mm)	0
Spot diameter (mm)	208
Length (mm)	336
Net weight (kg)	2.1
IP internal	65

Download

Mounting instructions ZIP

Photometric Files

LDT / IES LDT

Technical Drawings

2D ZIP

3D ZIP

Bim ZIP

IECEE CB SCHEME | EAC | RG 0 IEC 62471 | IK 07 | IP 65

https://professional.flos.com/en/global/product/captain-flint-outdoor-w1-dimmable-dali-f011w20d059/ F011W20D059

©2022 Flos - P.IVA 00290820174 - 4/6/2023

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Luminous flux luminaire
613 lm

Beam Angle: 112°

h(m)	E(lx)	D(m)
1	217	2.95
2	54	5.91
3	24	8.86
4	14	11.81
5	9	14.76

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	80
Beam angle C0-180 (°)	112
Beam angle C90-270 (°)	112

Electrical

Insulation class	I
Frequency (Hz)	50-60
Main voltage (Vac)	220-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable DALI 1
Precabled	no
Emergency type	No
Batteries inside	No

Notes

110V version upon request.

©2022 Flos - P.IVA 00290820174 - 4/6/2023

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.