

FLOS

 F9520039 Green


Wireline

Designed by Formafantasma, 2019

45W - 2793lm - 2700K - CRI> 90



Suspension lamp with diffused light. Tubular in transparent extruded glass and internal diffuser in opal PC. Ferrules made with CNC technology in satin stainless steel. Extruded cable in pink and forest green rubber. Injection molded PC rosette in the same finishes as the cable. The electronics integrated in the ceiling rose allows the use of different dimerization systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the luminous flux can be set during installation, with the push system included in the canopy. Useful length of the cable 3mt.

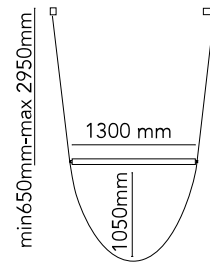

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	45
System power (W)	45
System flux (lm)	2793

Physical

Colour	Green
Length (mm)	1300
Cord colour	Green
Cord length (mm)	4050
Canopy colour	Green
Canopy dimension (mm)	130
Canopy height (mm)	70
Net weight (kg)	7.8
Package volume (m3)	0.05
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)


Technical Drawings

3D [↓ ZIP](#)

 Bim [↓ ZIP](#)



Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Power Supply	Integrated
Dimmable	Yes
Power Supply Type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

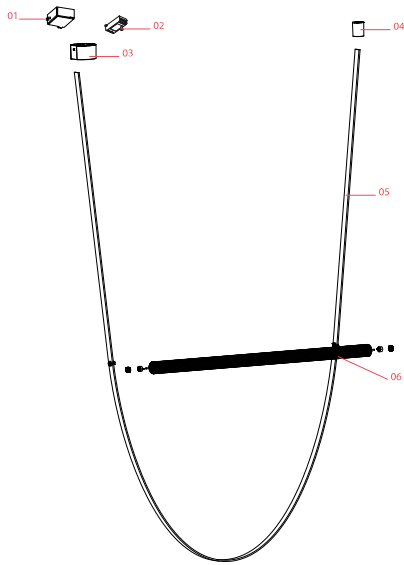

01.	Power supply unit for led	RF22934
02.	12-48V Led Dimmer	RF26994
03.	Assembly Rose Cover Green	RF9523139
04.	Assembly Suspension Rose for Wirelines Green	RF30045
05.	WireLine Green Wire	F9522039
06.	WireLine Body	F9521000



RF22934

Power supply unit for led



RF26994

12-48V Led Dimmer



RF9523139

Assembly Rose Cover Green



RF30045

Assembly Suspension Rose for Wirelines Green



F9522039

WireLine Green Wire



F9521000

WireLine Body