

FLOS

08.8595.AAA Black

Junco 250 mm



Luminaire that offers many possibilities. Can be individually focused and their recessed height is adjustable.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Enviroment	Indoor dry location
LED type	Power LED
Lamp category	LED
Ilcos	No
Power (W)	2.2
Source flux (lm)	182
System flux (lm)	130

Physical

Colour	Black
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	20
Recessed depth (mm)	210
Length (mm)	250
Net weight (kg)	0.13
IP internal	20
IP external	20

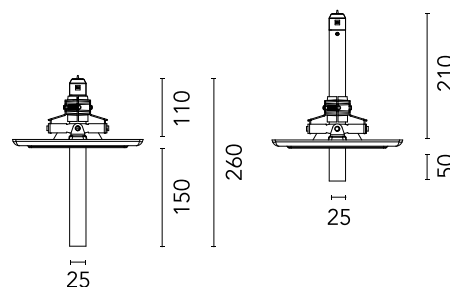

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download LDT](#)

Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	15

Electrical

Main voltage (Vac)	3.00
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable Push, Dimmable 1-10V
Emergency type	No

Notes

Soft Plate to be order separately.

Accessories & Power Supply



OPTIONAL
Power supply

60.8533

Continuous current power supply of 25W, 110/240V - 50/60Hz with power current selected through adjustable 350 mA-18W / 400 mA - 21W / 500mA - 25W /600mA - 30W /700/750/900 mA - 32W switch. 1-10V or push dimming, synchronisation cables not included.



OPTIONAL
Power supply

60.8534

Continuous current power supply. 230/240V - 50/60Hz. Adjustable Current 350mA - 17W / 500mA - 24W / 550mA - 25W / 700/ 750 mA - 32W switch by trailing and leading edge dimming, mains dimming or push dimming



OPTIONAL
Power supply

60.8655

Not dimmable continuous current power supply of 17W, 700 mA - 110/240V - 50/60Hz