

FLOS

03.9570.EU Brushed Rose Gold

Super Line Pro Down NEW


Designed by Flos Architectural



LED luminaire for general lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately, allowing the maximum brightness to be selected.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

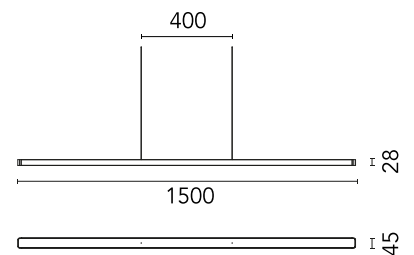

Main specifications

Mounting	Suspension
Environment	Indoor dry location
Light source type	LED
LED type	Top LED
Lamp category	LED
Number of heads	1
Power (W)	38.7
System power (W)	39
System flux (lm)	3801
Efficacy (lm/W)	97.46

Physical

Colour	Brushed Rose Gold
Orientation	Fixed
Length (mm)	1500
Net weight (kg)	1.45
IP	20
IP external	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)


3D [↓ ZIP](#)



Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

<https://professional.flos.com/en/global/product/super-line-pro-down-03.9570.eu/>


03.9570.EU

©2022 Flos - P.IVA 00290820174 - 12/25/2022

professional.flos.com | info@flos.com 1/6

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50 - 50.0000h (Tc 85°C)
Beam angle C0-180 (°)	80
Beam angle C90-270 (°)	80
UGR _L	19

Electrical

Insulation class	III
Main voltage (Vac)	37
Forward voltage (V)	37
LED current (mA)	1050
Driver	Remote
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

Accessories & Power Supply



REQUIRED
Power supply
Electrical

08.0524.40
Remote Power Supply Kit 60W.
Non Dimmable



REQUIRED
Power supply
Electrical

08.0524.02
Remote Power Supply Kit 60W.
Non Dimmable



REQUIRED
Power supply
Electrical

08.0525.40A
Remote Power Supply Kit 60W.
Dali Version



REQUIRED
Power supply
Electrical

08.0524.14
Remote Power Supply Kit 60W.
Non Dimmable



REQUIRED
Power supply
Electrical

08.0525.EUA
Remote Power Supply Kit 60W.
Dali Version



REQUIRED
Electrical

08.0524.ET
Remote Power Supply Kit 60W.
Non Dimmable




REQUIRED
Electrical

08.0524.EU
Remote Power Supply Kit 60W.
Non Dimmable



REQUIRED
Power supply
Electrical

08.0523.EUA
Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0520.02A

Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0520.14A


Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0522.EUA

Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0521.02A

Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0523.14A

Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0525.ETA


Remote Power Supply Kit 60W.
Dali Version



REQUIRED
Power supply
Electrical

08.0522.ETA


Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0520.40A

Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0522.40A


Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0525.02A


Remote Power Supply Kit 60W.
Dali Version



REQUIRED
Power supply
Electrical

08.0521.ETA


Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0520.ETA

Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0520.EUA


Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0522.14A


Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0521.40A

Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0522.02A

Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0521.14A


Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0523.ETA


Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0523.40A

Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0523.02A

Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0521.EUA

Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0525.14A

Remote Power Supply Kit 60W.
Dali Version