
FLOS

03.5330.AN Black


In-Finity 25 mm

Designed by FLOS Architectural, 2022



19.2W - 1008lm - 3000K - CRI> 90 - Beam° 91

LED profile for linear lighting, only 25 mm wide. Available in surface mounted versions, with possibility of suspended installation by means of a dedicated kit. Drivers not included.

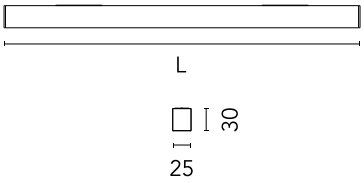

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Surface and suspension
Enviroment	Indoor dry location
LED type	Top LED
Number of heads	1
Power (W)	19.2
System power (W)	19.4
Source flux (lm)	2103
System flux (lm)	1008

Physical

Colour	Black
Orientation	Fixed
Length (mm)	1000
Net weight (kg)	0.52
Package volume (m3)	0.02
IP internal	20

Download

Mounting instructions PDF

Mounting instructions PDF

Photometric Files

LDT / IES ZIP

Technical Drawings

2D ZIP

3D ZIP

RETILAP


RG 1 IEC 62471

IP 20

©2022 Flos - P.IVA 00290820174 - 3/13/2023

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing




Luminous flux luminaire
1008 lm

Beam Angle: 91°

h(m)	E(lx)	D(m)
1	425	2.04
2	106	4.07
3	47	6.11
4	27	8.15
5	17	10.18

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional

Photometric

Lighting type	Direct
CCT (K)	3000
CRI>	90
Rf fidelity index	-9
Rg gamut index	-9
LED Life / Failure Ratio	L90B50 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	91
Beam angle C90-270 (°)	102

Electrical

Insulation class	III
Forward voltage (V)	24
LED current (mA)	800
Driver	Remote
Dimmable	No
Dimming type	Non Dimmable

©2022 Flos - P.IVA 00290820174 - 3/13/2023

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Accessories & Power Supply



REQUIRED
Accessory

Installation

08.0131.40

Endcap for In-Finity 25 mm



REQUIRED
Power supply

60.9516

Remote Power Supply Non Dimmable 24V. 120W. 220/240V




REQUIRED
Power supply

Electrical

60.9515

Remote Power Supply Non Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

Electrical

60.9705

Remote Power Supply Non Dimmable 24V. 60W. 220/240V



OPTIONAL
Accessory

Installation

08.0139.00

Suspension Kit for In-Finity 25mm

©2022 Flos - P.IVA 00290820174 - 3/13/2023

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.