


# FLOS


N70S303G30B White

## In-Finity 70 Surface 3000K General Lighting

Designed by FLOS Architectural, 2017

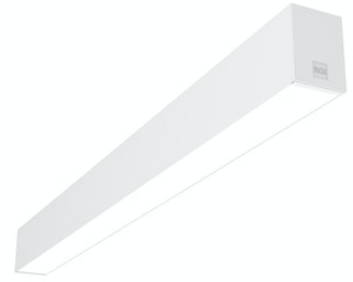

LED modular system for surface installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

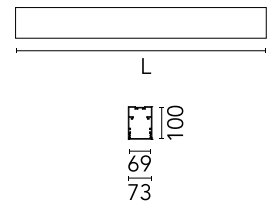

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Surface
Environment	Indoor dry location
LED type	Top LED
Lamp category	LED
Ilcos	No
Power (W)	71
System flux (lm)	6942

### Physical

Colour	White
Trim	No
Orientation	Fixed
Length (mm)	3095
Net weight (kg)	13.6
IP internal	20

### Download

Mounting instructions [↓ ZIP](#)

### Photometric Files

LDT / IES [↓ ZIP](#)


### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



## Schematic light drawing

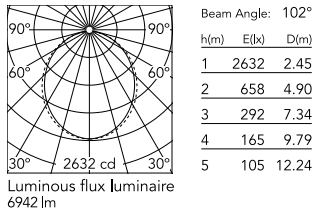

### Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	102
Beam angle C90-270 (°)	106

### Electrical

Insulation class	I
Frequency (Hz)	50/60
Driver	Integrated
Dimmable	No
Dimming type	Non Dimmable
Emergency type	No

### Notes

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. /  
Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

## Accessories & Power Supply



5

OPTIONAL  
Accessory

08.9052.02

Metal End Cap. Recessed No Trim  
/ Surface / Suspension Down. 70  
mm (Colour Anodized Grey)



5

OPTIONAL  
Accessory

08.9052.40

Metal End Cap. Recessed No Trim  
/ Surface / Suspension Down. 70  
mm (Colour White)



5

OPTIONAL  
Accessory

08.9052.NS

Metal End Cap. Recessed No Trim  
/ Surface / Suspension Down. 70  
mm (Colour Black)



OPTIONAL  
Accessory

08.0110.00

500 mm opal diffuser. Diffuse,  
glare free and uniform lighting  
throughout the room