

Camera 60 Non Dimmable

Designed by Knud Holscher, 2020




LED - LED array - 20W - 1310lm - 3000K - CRI> 97 - Beam° 34

Spotlight to be installed on 3-phase track with LED light source. 220- 240V, 50-60Hz power supply integrated. To be used with The Tracking Power profiles.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

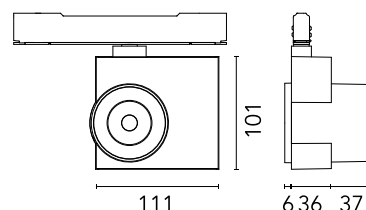

Main specifications

Mounting	Track
Environment	Indoor dry location
Light source type	LED
LED type	LED array
Lamp category	LED
Bulb finish	Clear
Number of heads	1
Power (W)	20
Source flux (lm)	1585
System flux (lm)	1310
Efficacy (lm/W)	65.5

Physical

Colour	Textured White
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Spot diameter (mm)	60
Length (mm)	111
Net weight (kg)	0.57
IP internal	20
IP external	20

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)

Technical Drawings


2D [Download ZIP](#)

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling



Replaceable (LED only)
light source by a
professional

Replaceable control
gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	97
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50
Beam angle C0-180 (°)	34
Beam angle C90-270 (°)	34
UGR _L	3

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Driver input voltage (V)	230
Alternating current voltage (Vac)	230
Driver	Integrated
Dimmable	No
Dimming type	Non Dimmable
Dimming range (%)	1-100
Dimming interface	Not Dimmable
Emergency type	No

Accessories & Power Supply



OPTIONAL
Accessory

08.0176.14

Honeycomb