


In-Finity 100 Recessed No Trim 3000K General Lighting


Designed by FLOS Architectural, 2014

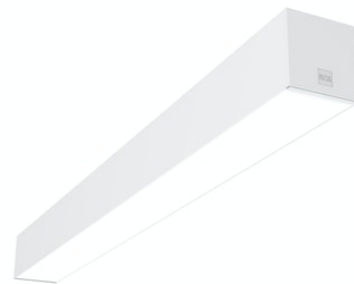

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Recessed
Enviroment	Indoor dry location
LED type	Top LED
Lamp category	LED
Ilcos	No
Power (W)	79
Source flux (lm)	14740
System flux (lm)	8323

Physical

Colour	White
Trim	No
Orientation	Fixed
Recessed depth (mm)	135
Length (mm)	3095
Net weight (kg)	21.40
IP internal	40

Download

Mounting instructions [ZIP](#)

Photometric Files

LDT / IES [ZIP](#)


Technical Drawings

2D [ZIP](#)

3D [ZIP](#)



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	103
Beam angle C90-270 (°)	107

Electrical

Insulation class	I
Frequency (Hz)	50/60
Driver	Integrated
Dimmable	No
Dimming type	Non Dimmable
Emergency type	No

Notes

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. /
Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

Accessories & Power Supply



OPTIONAL
Accessory

08.9054.40

Metal End Cap. Recessed No Trim
/ Surface / Suspension Down. 100
mm (Colour White)



OPTIONAL
Accessory

08.0111.00

500 mm opal diffuser. Diffuse,
glare free and uniform lighting
throughout the room