

Cupolina

table lamp



Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Photometric data and technical information	Page 3
5. Ordering codes	Page 3
6. Certifications & standards	Page 4
7. Maintenance & Cleaning	Page 4

Versions



3937
Page 3

Cupolina

table lamp

1. Product overview

Table lamp with a soft-edged rectangular metal body, aluminium dome head, acrylic lens diffuser and integrated integrated LED.
On/Off cord switch.



2. Finishes and Materials



26 Black
59 Terracota

3. Light Source & Dimming

Lamping

LED 6,2W (2700K / Ang. 90° / >90 CRI / 350mA)

230V / Typ* 725 lumens

*Integrated LED module (included).

On/Off cord switch


Cupolina

table lamp

4. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp.
Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area here.

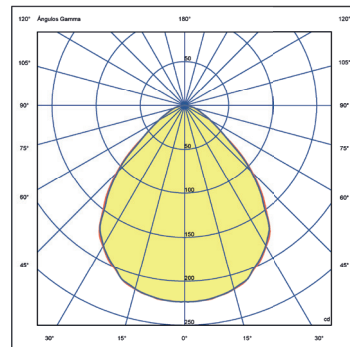

5. Ordering Codes

Lamping

LED 6,2W (2700K / Ang. 90° / >90 CRI / 350mA)

230V / Typ* 725 lumens

*Integrated LED module (included).

On/Off cord switch

Finishes

26 Black

59 Terracotta




Drawing	Mounting	Finish Body	Ordering Code
CUP_3937 310 mm 12.1/4" 450 mm 17.3/4" 210 mm 8.1/4" 109 mm 4.1/4" Ø 92 mm Ø 3.5/8"	Table lamp	Black	CUP_3937_26W
		Terracotta	CUP_3937_59W

Cupolina

table lamp

6. Certifications & Standards



Warranty: 2 years

100% made in Spain

7. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.