

# BLOCK

## 6091619

BLOCK Bollard H. 500 mm - LED 3000K 1 Opening



DISCONTINUED  
Item available until stocks are exhausted.  
Please check availability with our sales department.

## Lighting information

Source power type	LED
Colour temperature	3000K
CRI	>80
MCADAMS	3
LM 80/TM-21	L80B10@>60Kh

Source power	8,00 W
Nominal flux	1040 lm

Plug-in power	9,80 W
Real flux	200 lm
Maximum intensity	1710 cd/klm
Beam angle	1 Opening

Power Supply Unit	220 ÷ 240V
Operating frequency	0/50/60 Hz
Power factor	0,60
Dimmable	Not dimmable
Safety class	I
Wiring	External

Protection Rating	IP65
Breaking Strength	IK 06

Energy efficiency class	A/A+/A++
Diffuser type	White serigraphed glass
Diffuser thickness	4 mm

**Platek®**

PLATEK s.r.l.  
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY  
P.IVA 03320290178 | Codice fiscale 03007130176  
Registro delle Imprese di Brescia n. 03007130176 REA 311057  
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:04/02/2022




# 6091619

BLOCK Bollard H. 500 mm - LED 3000K 1 Opening


## Product features

Cast concrete body available in three colors (neutral, anthracite and lava). No visible screws. Floor fixing flange with AISI 304 stainless steel completely concealed. Tempered white glass diffuser. Pre-treatment with atmospheric pressure plasma is carried out on the surface before gluing of the diffuser on Platek products.

## Technical dimensions

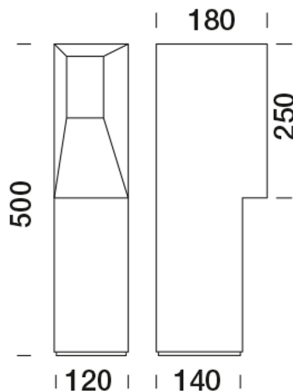

## Lighting information



Plug-in power	9,80 W
Real flux	200 lm
Maximum intensity	1710 cd/klm
Beam angle	1 Opening

Plug-in power	9,80 W
Real flux	200 lm
Maximum intensity	1710 cd/klm
Beam angle	1 Opening

## Technical shipping information

Net weight	12,50 kg
Gross weight	13,50 kg
Packaging width	340,00 mm
Packaging height	210,00 mm
Packaging depth	700,00 mm

## Platek®

PLATEK s.r.l.  
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY  
P.IVA 03320290178 | Codice fiscale 03007130176  
Registro delle Imprese di Brescia n. 03007130176 REA 311057  
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:04/02/2022



# BLOCK

# 6091619

BLOCK Bollard H. 500 mm - LED 3000K 1 Opening

## Precise LED selection

All LEDs used by Platek, once assembled by trusted personnel are tested with suitable instruments to check the colour specification required by Platek standards. The choice of using only 3 McAdams colour steps and with a CRI value exceeding 90, provide a high level of light quality that is difficult to find in the world of outdoor lighting. As far as LED products are concerned, Platek has adopted a system of protection against electrostatic discharge along the entire production chain of electronic components to increase the resistance of circuits to power surges.